

## (12) UK Patent Application (19) GB (11) 2 418 690 (13) A

(43) Date of A Publication 05.04.2006

(21) Application No: 0525663.1  
 (22) Date of Filing: 12.05.2003  
 Date Lodged: 16.12.2005  
 (30) Priority Data:  
 (31) 60391703 (32) 26.06.2002 (33) US  
 (62) Divided from Application No  
 0501667.0 under Section 15(4) of the Patents Act 1977

(71) Applicant(s):  
 Enventure Global Technology  
 (Incorporated in USA - Delaware)  
 16200-A Park Row, Houston, Texas 77084,  
 United States of America

(72) Inventor(s):  
 David Paul Brisco  
 Lev Ring

(continued on next page)

(51) INT CL:  
 E21B 23/04 (2006.01) E21B 23/08 (2006.01)  
 E21B 43/10 (2006.01)

(52) UK CL (Edition X):  
 E1F FLA

(56) Documents Cited:  
 US 6575240 B1 US 6497289 B1  
 US 6470966 B2 US 6085838 A  
 US 20010047870 A

(58) Field of Search:  
 UK CL (Edition X) E1F  
 INT CL E21B  
 Other:

(54) Abstract Title: **Expansion device**

(57) An apparatus 10 for radially expanding and plastically deforming a tubular member 24 comprises a tubular support member 16 that defines a longitudinal passage and an expansion cone 18 coupled to an end of the tubular support member 16 that defines a longitudinal passage 18b and one or more radial passages 18ca, 18cb that extend from the longitudinal passage 18b and extend to an outer surface of the expansion device 18. A tubular expansion launcher 20 receives and mates with the expansion device 18 and an expandable tubular member 24 is coupled to an end of the tubular expansion launcher 20. One or more cup seals 26 are coupled to the tubular support member 16 for sealingly engaging the interior surface of the expandable tubular member 24.

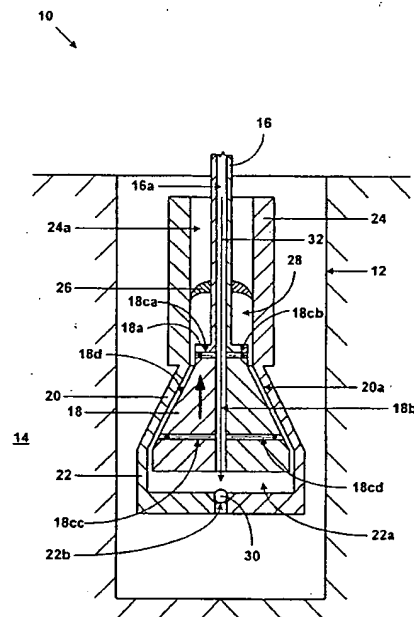


Fig. 2a

**GB 2418690 A continuation**

**(74) Agent and/or Address for Service:  
Haseltine Lake & Co  
Redcliff Quay, 120 Redcliff Street,  
BRISTOL, BS1 6HU, United Kingdom**

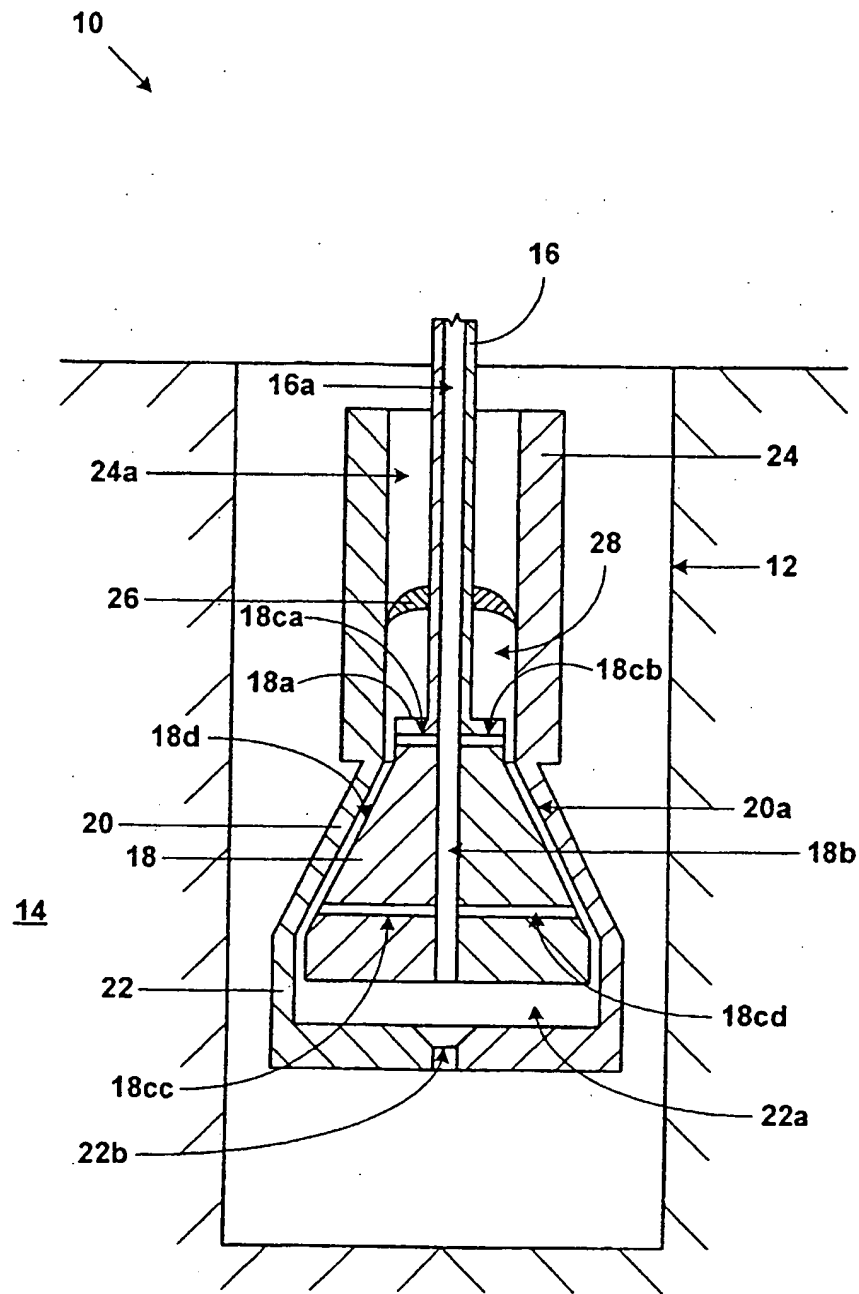


Fig. 1

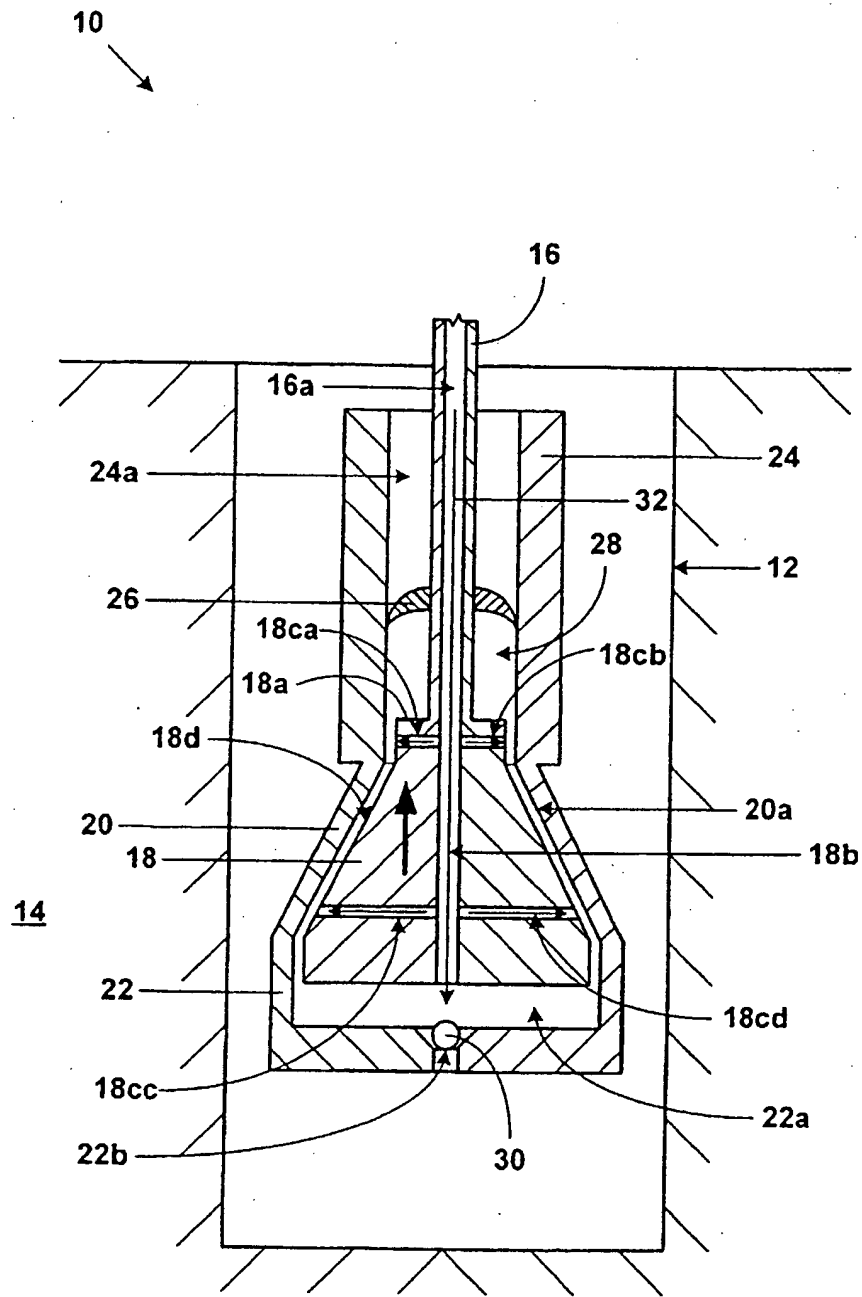


Fig. 2a

10

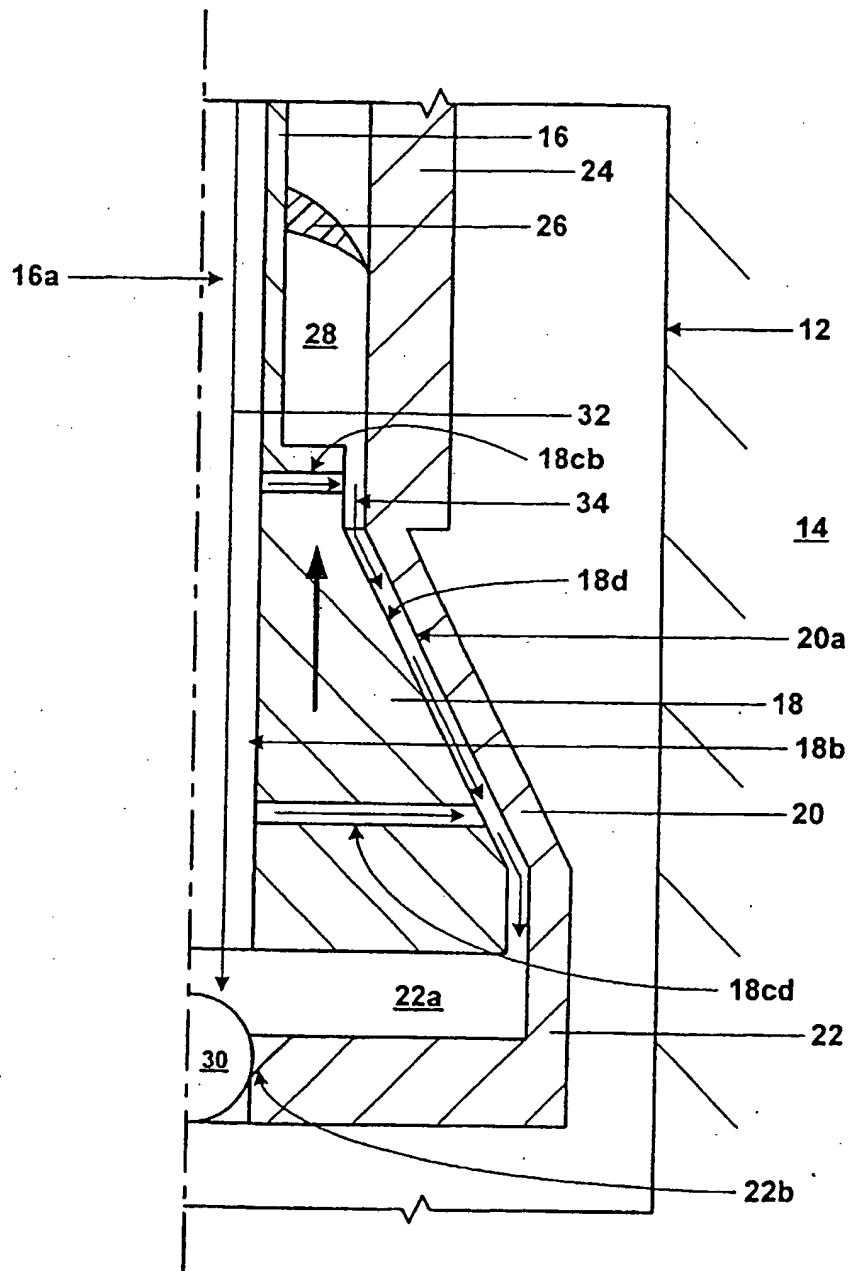


Fig. 2b

TYPICAL  
OPERATING  
PRESSURE  
FOR  
RADIAL  
EXPANSION  
OF TUBULAR

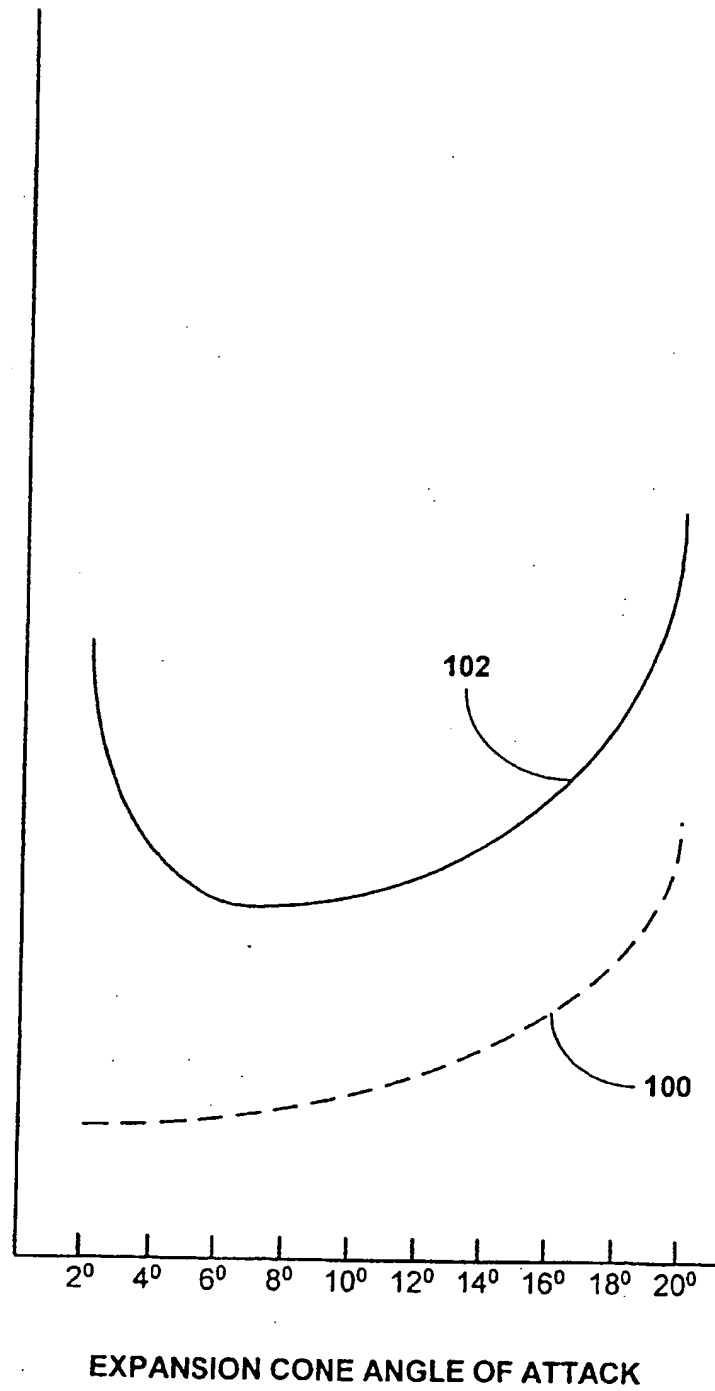


Fig. 3

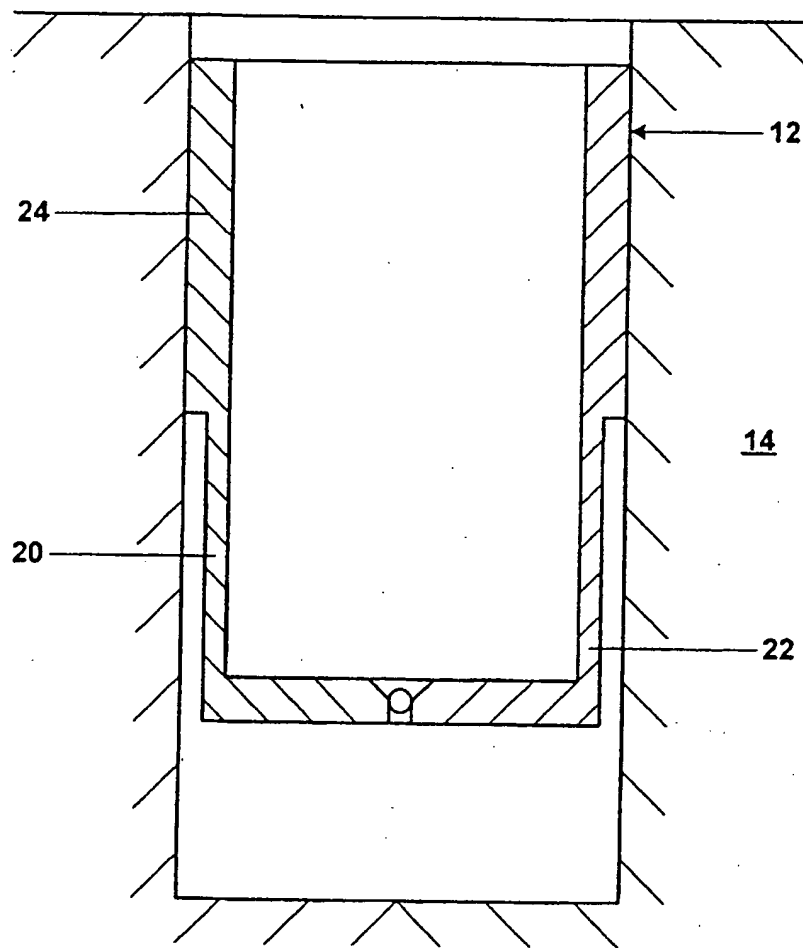


Fig. 4

# SYSTEM FOR RADially EXPANDING A TUBULAR MEMBER

## Cross Reference To Related Applications

The present application claims the benefit of the filing dates of (1) U.S. provisional patent application serial no. 60/391,703, attorney docket no 25791.90, filed on 6/26/2002, the disclosure of which is incorporated herein by reference

The present application is related to the following: (1) U.S. patent application serial no. 09/454,139, attorney docket no. 25791.03.02, filed on 12/3/1999, (2) U.S. patent application serial no. 09/510,913, attorney docket no. 25791.7.02, filed on 2/23/2000, (3) U.S. patent application serial no. 09/502,350, attorney docket no. 25791.8.02, filed on 2/10/2000, (4) U.S. patent no. 6,328,113, (5) U.S. patent application serial no. 09/523,460, attorney docket no. 25791.11.02, filed on 3/10/2000, (6) U.S. patent application serial no. 09/512,895, attorney docket no. 25791.12.02, filed on 2/24/2000, (7) U.S. patent application serial no. 09/511,941, attorney docket no. 25791.16.02, filed on 2/24/2000, (8) U.S. patent application serial no. 09/588,946, attorney docket no. 25791.17.02, filed on 6/7/2000, (9) U.S. patent application serial no. 09/559,122, attorney docket no. 25791.23.02, filed on 4/26/2000, (10) PCT patent application serial no. PCT/US00/18635, attorney docket no. 25791.25.02, filed on 7/9/2000, (11) U.S. provisional patent application serial no. 60/162,671, attorney docket no. 25791.27, filed on 11/1/1999, (12) U.S. provisional patent application serial no. 60/154,047, attorney docket no. 25791.29, filed on 9/16/1999, (13) U.S. provisional patent application serial no. 60/159,082, attorney docket no. 25791.34, filed on 10/12/1999, (14) U.S. provisional patent application serial no. 60/159,039, attorney docket no. 25791.36, filed on 10/12/1999, (15) U.S. provisional patent application serial no. 60/159,033, attorney docket no. 25791.37, filed on 10/12/1999, (16) U.S. provisional patent application serial no. 60/212,359, attorney docket no. 25791.38, filed on 6/19/2000, (17) U.S. provisional patent application serial no. 60/165,228, attorney docket no. 25791.39, filed on 11/12/1999, (18) U.S. provisional patent application serial no. 60/221,443, attorney docket no. 25791.45, filed on 7/28/2000, (19) U.S. provisional patent application serial no. 60/221,645, attorney docket no. 25791.46, filed on 7/28/2000, (20) U.S. provisional patent application serial no. 60/233,638, attorney docket no. 25791.47, filed on 9/18/2000, (21) U.S. provisional patent application serial no. 60/237,334, attorney docket no. 25791.48, filed on 10/2/2000, (22) U.S. provisional patent application serial no. 60/270,007, attorney docket no. 25791.50, filed on



2/20/2001, (23) U.S. provisional patent application serial no. 60/262,434, attorney docket no. 25791.51, filed on 1/17/2001, (24) U.S. provisional patent application serial no. 60/259,486, attorney docket no. 25791.52, filed on 1/3/2001, (25) U.S. provisional patent application serial no. 60/303,740, attorney docket no. 25791.61, filed on 7/6/2001, (26) U.S. provisional patent application serial no. 60/313,453, attorney docket no. 25791.59, filed on 8/20/2001, (27) U.S. provisional patent application serial no. 60/317,985, attorney docket no. 25791.67, filed on 9/6/2001, (28) U.S. provisional patent application serial no. 60/3318,386, attorney docket no. 25791.67.02, filed on 9/10/2001, (29) U.S. utility patent application serial no. 09/969,922, attorney docket no. 25791.69, filed on 10/3/2001, (30) U.S. utility patent application serial no. 10/016,467, attorney docket no. 25791.70, filed on 12/10/2001, (31) U.S. provisional patent application serial no. 60/343,674, attorney docket no. 25791.68, filed on 12/27/2001, (32) U.S. provisional patent application serial no. 60/346,309, attorney docket no. 25791.92, filed on 1/7/2002, (33) U.S. provisional patent application serial no. 60/372,048, attorney docket no. 25791.93, filed on 4/12/2002, (34) U.S. provisional patent application serial no. 60/372,632, attorney docket no. 25791.101, filed on 4/15/2002, (35) U.S. provisional patent application serial no. 60/380,147, attorney docket no. 25791.104, filed on 5/6/2002, (36) U.S. provisional patent application serial no. 60/387,486, attorney docket no. 25791.107, filed on 6/10/2002, and (37) U.S. provisional patent application serial no. 60/387,961, attorney docket no. 25791.108, filed on 6/12/2002, the disclosures of which are incorporated herein by reference.

### **Background of the Invention**

This invention relates generally to oil and gas exploration, and in particular to forming and repairing wellbore casings to facilitate oil and gas exploration and production.

Conventionally, when a wellbore is created, a number of casings are installed in the borehole to prevent collapse of the borehole wall and to prevent undesired outflow of drilling fluid into the formation or inflow of fluid from the formation into the borehole. The borehole is drilled in intervals whereby a casing which is to be installed in a lower borehole interval is lowered through a previously installed casing of an upper borehole interval. As a consequence of this procedure the casing of the lower interval is of smaller diameter than the casing of the upper interval. Thus, the casings are in a nested arrangement with casing diameters decreasing in downward direction. Cement annuli are provided between the outer surfaces of the casings and the borehole wall to

seal the casings from the borehole wall. As a consequence of this nested arrangement a relatively large borehole diameter is required at the upper part of the wellbore. Such a large borehole diameter involves increased costs due to heavy casing handling equipment, large drill bits and increased volumes of drilling fluid and drill cuttings.

- 5 Moreover, increased drilling rig time is involved due to required cement pumping, cement hardening, required equipment changes due to large variations in hole diameters drilled in the course of the well, and the large volume of cuttings drilled and removed.

- 10 The present invention is directed to overcoming one or more of the limitations of the existing processes for forming and repairing wellbore casings.

#### **Summary of the Invention**

- 15 According to one aspect of the present invention, a method of radially expanding a tubular member is provided that includes positioning an expansion cone within the tubular member, displacing the expansion cone relative to the tubular member, and during the displacement of the expansion cone relative to the tubular member, hydroplaning the tubular member on the expansion cone.

- 20 According to another aspect of the present invention, a system for radially expanding a tubular member is provided that includes means for positioning an expansion cone within the tubular member, means for displacing the expansion cone relative to the tubular member, and during the displacement of the expansion cone relative to the tubular member, means for hydroplaning the tubular member on the expansion cone.

- 25 According to another aspect of the present invention, an apparatus for radially expanding and plastically deforming a tubular member is provided that includes a tubular support member that defines a longitudinal passage, a tubular expansion cone coupled to an end of the tubular support member that defines a longitudinal passage and one or more radial passages that extend from the longitudinal passage and extend to an outer surface of the tubular expansion cone, a tubular expansion cone launcher that receives the tubular expansion cone, a tubular shoe coupled to an end of the tubular expansion cone launcher that defines a valveable longitudinal passage, an expandable tubular member coupled to another end of the tubular expansion cone launcher, and one or more cup seals coupled to the tubular support member for sealingly engaging the interior surface of the expandable tubular member.
- 30

#### **Brief Description of the Drawings**

Fig. 1 is a fragmentary cross-sectional illustration of the placement of an apparatus for radially expanding a tubular member within a borehole that traverses a subterranean formation.

5 Figs. 2a and 2b are fragmentary cross-sectional illustrations of the apparatus of Fig. 1 after initiating the radial expansion and plastic deforming of the tubular member.

Fig. 3 is a graphical illustration of the unexpected result provided during the operation of the apparatus of Figs. 2a and 2b during the radial expansion and plastic deformation of the tubular member.

10 Fig. 4 is a fragmentary cross-sectional illustration of the apparatus of Figs. 2a and 2b after completing the radial expansion and plastic deformation of the tubular member.

#### **Detailed Description of the Illustrative Embodiments**

In an exemplary embodiment, as illustrated in Fig. 1, an apparatus 10 is positioned within a borehole 12 that traverses a subterranean formation 14 that may  
15 include a source of hydrocarbons and/or geothermal energy.

In an exemplary embodiment, the apparatus includes a tubular support member 16 that defines a longitudinal passage 16a. An upper end 18a of a tubular expansion cone 18 that defines a longitudinal passage 18b, radial passages, 18ca and 18cb, that extend from the longitudinal passage to the outer surface of the tubular expansion cone  
20 above a conical outer surface 18d, and radial passages, 18cc and 18cd, that extend from the longitudinal passage to the conical outer surface, is coupled to an end of the tubular support member 16. In this manner, fluidic materials may be conveyed from the passage 16a of the tubular support member 16 through the longitudinal passage 18b of the tubular expansion cone 18 and into the radial passages, 18ca, 18cb, 18cc,  
25 and 18cd, of the tubular expansion cone.

A tubular tapered expansion cone launcher 20 receives the outer conical surface 18d of the tubular expansion cone 18 within an interior passage 20a. In an exemplary embodiment, the interior surface of the tubular tapered expansion cone launcher 20 is a conical surface that is complementary shaped with respect to the outer conical  
30 surface 18d of the tubular expansion cone 18. An end of a tubular shoe 22 is coupled to an end of the tubular tapered expansion cone launcher 20 that defines an interior passage 22a and a valveable longitudinal passage 22b that may be adapted to receive a valve member such as, for example, a ball.

An end of an expandable tubular 24 that defines an internal passage 24a is coupled to another end of the tubular tapered expansion cone launcher 20. In an exemplary embodiment, the wall thickness of the expandable tubular 24 is greater than the wall thickness of the tubular tapered expansion cone launcher 20. In this manner, the initiation of the radial expansion of the expandable tubular member 24 is facilitated and the apparatus 10 may be positioned within wellbores 12 having tight radial clearances relative to the expansion cone launcher 20.

A resilient GuibersonJ sealing cup 26 is coupled to the exterior of the tubular support 16. In an exemplary embodiment, during operation of the apparatus 10, the sealing cup 26 engages the interior surface of the expandable tubular member 24 and thereby defines an annular chamber 28 between the exterior of the tubular support 16 and the interior of the expandable tubular member above the tubular expansion cone 18.

In an exemplary embodiment, as illustrated in Figs. 2a and 2b, during operation of the apparatus 10, a ball 30 is placed in the valveable passage 22b of the shoe 22 by injecting a fluidic material 32 into the apparatus 10 through the passages 16a and 18b. In this manner, the interior 22a of the tubular shoe 22 below the tubular expansion cone 18 and the annular chamber 28 above the tubular expansion cone below the GuibersonJ cup seal 26 may both be pressurized. In particular, continued injection of the fluidic material 32 into the apparatus 10 through the passages 16a and 18b will pressurize the interior of the tubular shoe 22 below the tubular expansion cone 18 as well as the annular chamber 28 above the tubular expansion cone below the GuibersonJ cup seal 26. As a result, the tubular expansion cone 18 will be displaced upwardly in the longitudinal direction relative to the tubular expansion cone launcher 20, the tubular shoe 22, and the expandable tubular member 24. In particular, the pressurization of the annular chamber 28 will cause the GuibersonJ cup seal 26 to pull the tubular expansion cone 18 upwardly out of the apparatus 10. Furthermore, the pressurization of the interior 22a of the tubular shoe 22 below the tubular expansion cone 18 will push the tubular expansion cone upwardly out of the apparatus 10. As a result, the tubular expansion cone launcher 20 and the expandable tubular member 24 are radially expanded and plastically deformed.

In an exemplary embodiment, during the radial expansion and plastic deformation of the tubular expansion cone launcher 20 and the expandable tubular member 24, the fluidic material 32 is conveyed through the radial passages, 18ca,

18cb, 18cc, and 18cd, into the annulus 34 defined between the conical exterior surface 18d of the tubular expansion cone 18 and the interior surfaces of the tubular expansion cone launcher 20 and/or the expandable tubular member 24. As an unexpected result, the tubular expansion cone launcher 20 and/or the expandable tubular member 24 hydroplane on the conical outer surface 18d of the tubular expansion cone 18 during the radial expansion and plastic deformation of the tubular expansion cone launcher and expandable tubular member. During exemplary experimental testing of the apparatus 10, the unexpected hydroplaning of the expansion cone launcher 20 and/or the expandable tubular member 24 hydroplane on the conical outer surface 18d of the tubular expansion cone 18 during the radial expansion and plastic deformation of the tubular expansion cone launcher and expandable tubular member provided the further unexpected result of reducing the operating pressure of the fluidic material 32 required to radially expand and plastically deform the tubular expansion cone launcher 20 and/or the expandable tubular member 24. In an exemplary experimental test of the apparatus 10, the operating pressure within the annulus 34 was approximately equal to the operating pressures within the apparatus 10 below the tubular expansion cone 18 and within the annular chamber 28.

As illustrated in Fig. 3, the curve 100 illustrates typical required operating pressures of the fluidic material 32 in order to radially expand and plastically deform the tubular expansion cone launcher 20 and/or the expandable tubular member 24 for a range of angles of attack of the conical outer surface 18d of the tubular expansion cone 18. As will be recognized by persons having ordinary skill in the art, the angle of the attack of the conical outer surface 18d of the tubular expansion cone 18 refers to the angle of inclination of the conical outer surface relative to the longitudinal direction. By contrast, the curve 102 illustrates typical required operating pressures of the fluidic material 32 in order to radially expand and plastically deform the expandable tubular member 24 for a range of angles of attack of the conical outer surface 18d of the tubular expansion cone 18 where the radial passages, 18ca, 18cb, 18cc, and 18cd, were omitted from the tubular expansion cone. Unexpectedly, the omission of the radial passages, 18ca, 18cb, 18cc, and 18cd, from the tubular expansion cone 18 of the apparatus 10 significantly increased the required operating pressures of the fluidic material 32 in order to radially expand and plastically deform the expandable tubular member 24 across the range of angles of attack of the conical outer surface 18d of the tubular expansion cone 18. Thus, the unexpected hydroplaning of the expansion cone

launcher 20 and the expandable tubular member 24 hydroplane on the conical outer surface 18d of the tubular expansion cone 18 during the radial expansion and plastic deformation of the tubular expansion cone launcher and expandable tubular member provided the further unexpected result of reducing the operating pressure of the fluidic material 32 required to radially expand and plastically deform the tubular expansion cone launcher and/or the expandable tubular member.

In an exemplary embodiment, as illustrated in Fig. 4, after completing the radial expansion and plastic deformation of the tubular expansion cone launcher 20 and the expandable tubular member 24, the expandable tubular member is coupled to the interior surface of the borehole 12.

A method of radially expanding a tubular member has been described that includes positioning an expansion cone within the tubular member, displacing the expansion cone relative to the tubular member, and during the displacement of the expansion cone relative to the tubular member, hydroplaning the tubular member on the expansion cone. In an exemplary embodiment, displacing the expansion cone relative to the tubular member includes pulling the expansion cone through the tubular member using fluid pressure. In an exemplary embodiment, pulling the expansion cone through the tubular member using fluid pressure includes pressuring an annular chamber within the tubular member above the expansion cone. In an exemplary embodiment, displacing the expansion cone relative to the tubular member includes pushing the expansion cone through the tubular member using fluid pressure. In an exemplary embodiment, pushing the expansion cone through the tubular member using fluid pressure includes pressurizing a chamber within the tubular member below the expansion cone. In an exemplary embodiment, hydroplaning the tubular member on the expansion cone includes injecting a fluidic material into an annulus between the expansion cone and the tubular member. In an exemplary embodiment, the expansion cone includes a conical outer surface, and the fluidic material is injected into a portion of the annulus above the conical outer surface. In an exemplary embodiment, the expansion cone includes a conical outer surface, and the fluidic material is injected into a portion of the annulus bounded by the conical outer surface. In an exemplary embodiment, the expansion cone includes a conical outer surface, and the fluidic material is injected into a portion of the annulus above the conical outer surface and another portion of the annulus bounded by the conical outer surface. In an exemplary embodiment, displacing the expansion cone relative to the tubular member includes

pulling the expansion cone through the tubular member using fluid pressure. In an exemplary embodiment, pulling the expansion cone through the tubular member using fluid pressure includes pressuring an annular chamber within the tubular member above the expansion cone. In an exemplary embodiment, the operating pressure of the annular chamber and the annulus are approximately equal. In an exemplary embodiment, displacing the expansion cone relative to the tubular member includes pushing the expansion cone through the tubular member using fluid pressure. In an exemplary embodiment, pushing the expansion cone through the tubular member using fluid pressure includes pressurizing a chamber within the tubular member below the expansion cone. In an exemplary embodiment, the operating pressure of the chamber and the annulus are approximately equal.

A system for radially expanding a tubular member has been described that includes means for positioning an expansion cone within the tubular member, means for displacing the expansion cone relative to the tubular member, and during the displacement of the expansion cone relative to the tubular member, means for hydroplaning the tubular member on the expansion cone. In an exemplary embodiment, the means for displacing the expansion cone relative to the tubular member includes means for pulling the expansion cone through the tubular member using fluid pressure. In an exemplary embodiment, the means for pulling the expansion cone through the tubular member using fluid pressure includes means for pressuring an annular chamber within the tubular member above the expansion cone. In an exemplary embodiment, the means for displacing the expansion cone relative to the tubular member includes means for pushing the expansion cone through the tubular member using fluid pressure. In an exemplary embodiment, the means for pushing the expansion cone through the tubular member using fluid pressure includes means for pressurizing a chamber within the tubular member below the expansion cone. In an exemplary embodiment, the means for hydroplaning the tubular member on the expansion cone includes means for injecting a fluidic material into an annulus between the expansion cone and the tubular member. In an exemplary embodiment, the expansion cone includes a conical outer surface, and the means for injecting a fluidic material into the annulus between the expansion cone and the tubular member includes means for injecting a fluidic material a portion of the annulus above the conical outer surface. In an exemplary embodiment, the expansion cone includes a conical outer surface, and the means for injecting a fluidic material into the annulus between

the expansion cone and the tubular member includes means for injecting a fluidic material into a portion of the annulus bounded by the conical outer surface. In an exemplary embodiment, the expansion cone includes a conical outer surface, and the means for injecting a fluidic material into the annulus between the expansion cone and the tubular member includes means for injecting a fluidic material into a portion of the annulus above the conical outer surface and another portion of the annulus bounded by the conical outer surface. In an exemplary embodiment, the means for displacing the expansion cone relative to the tubular member includes means for pulling the expansion cone through the tubular member using fluid pressure. In an exemplary embodiment, the means for pulling the expansion cone through the tubular member using fluid pressure includes means for pressuring an annular chamber within the tubular member above the expansion cone. In an exemplary embodiment, the operating pressure of the annular chamber and the annulus are approximately equal. In an exemplary embodiment, the means for displacing the expansion cone relative to the tubular member includes means for pushing the expansion cone through the tubular member using fluid pressure. In an exemplary embodiment, the means for pushing the expansion cone through the tubular member using fluid pressure includes means for pressurizing a chamber within the tubular member below the expansion cone. In an exemplary embodiment, the operating pressure of the chamber and the annulus are approximately equal.

An apparatus for radially expanding and plastically deforming a tubular member has been described that includes a tubular support member that defines a longitudinal passage, a tubular expansion cone coupled to an end of the tubular support member that defines a longitudinal passage and one or more radial passages that extend from the longitudinal passage and extend to an outer surface of the tubular expansion cone, a tubular expansion cone launcher that receives the tubular expansion cone, a tubular shoe coupled to an end of the tubular expansion cone launcher that defines a valveable longitudinal passage, an expandable tubular member coupled to another end of the tubular expansion cone launcher, and one or more cup seals coupled to the tubular support member for sealingly engaging the interior surface of the expandable tubular member. In an exemplary embodiment, the tubular expansion cone includes a tapered outer surface and a non tapered outer surface, and at least one of the radial passages extend to the non tapered outer surface. In an exemplary embodiment, at least one of the radial passages extend to the tapered outer surface. In an exemplary



embodiment, the tubular expansion cone includes a tapered outer surface and a non tapered outer surface; wherein at least one of the radial passages extend to the non tapered outer surface, and at least one other of the radial passages extend to the tapered outer surface.

5           It is understood that variations may be made in the foregoing without departing from the scope of the invention. For example, the teachings of the present illustrative embodiments may be used to provide a wellbore casing, a pipeline, or a structural support. Furthermore, the elements and teachings of the various illustrative  
10       embodiments may be combined in whole or in part in some or all of the illustrative embodiments. In addition, the tubular expansion cone 18 may include one or more radial passages 18c extending from the longitudinal passage 18b to the exterior surface of the tubular expansion cone. Furthermore, the apparatus may include one or more GuibersonJ cup seals 26.

15           Although illustrative embodiments of the invention have been shown and described, a wide range of modification, changes and substitution is contemplated in the foregoing disclosure. In some instances, some features of the present invention may be employed without a corresponding use of the other features. Accordingly, it is appropriate that the appended claims be construed broadly and in a manner consistent with the scope of the invention.

20

## **CLAIMS**

1. An apparatus for radially expanding and plastically deforming a tubular member, comprising:
  - 5 a tubular support member that defines a longitudinal passage;  
an expansion device coupled to an end of the tubular support member that defines a longitudinal passage and one or more radial passages that extend from the longitudinal passage and extend to an outer surface of the expansion device;
  - a tubular expansion launcher that receives the expansion device;
  - 10 an expandable tubular member coupled to an end of the tubular expansion launcher; and  
one or more cup seals coupled to the tubular support member for sealingly engaging the interior surface of the expandable tubular member.
- 15 2. The apparatus of claim 1, wherein the expansion device comprises a tapered outer surface and a non tapered outer surface; and  
wherein at least one of the radial passages extends to the non tapered outer surface.
- 20 3. The apparatus of claim 2, wherein at least one other of the radial passages extends to the tapered outer surface.
4. The apparatus of claim 1, wherein the expansion device comprises a tapered outer surface and a non tapered outer surface;
  - 25 wherein at least one of the radial passages extends to the non tapered outer surface; and  
wherein at least one other of the radial passages extends to the tapered outer surface.
- 30 5. The apparatus of claim 1 wherein the expansion device comprises a tubular expansion cone;  
wherein the tubular expansion launcher comprises a tubular expansion cone launcher that receives the tubular expansion cone; and

wherein the apparatus further comprises a tubular shoe coupled to an end of the tubular expansion cone launcher that defines a valveable longitudinal passage.

6. The apparatus of claim 5, wherein the tubular expansion cone comprises a  
5 tapered outer surface and a non tapered outer surface; and  
wherein at least one of the radial passages extends to the non tapered outer surface.

7. The apparatus of claim 6, wherein at least one other of the radial passages  
10 extends to the tapered outer surface.

8. The apparatus of claim 5, wherein the tubular expansion cone comprises a tapered outer surface and a non tapered outer surface;  
wherein at least one of the radial passages extends to the non tapered outer  
15 surface; and  
wherein at least one other of the radial passages extends to the tapered outer surface.

What is claimed is:

1. A method of radially expanding a tubular member, comprising:  
5       positioning an expansion cone within the tubular member;  
          displacing the expansion cone relative to the tubular member; and  
          during the displacement of the expansion cone relative to the tubular member,  
          hydroplaning the tubular member on the expansion cone.
- 10   2. The method of claim 1, wherein displacing the expansion cone relative to the  
      tubular member comprises:  
          pulling the expansion cone through the tubular member using fluid pressure.
3. The method of claim 2, wherein pulling the expansion cone through the tubular  
15   member using fluid pressure comprises:  
          pressuring an annular chamber within the tubular member above the expansion  
          cone.
4. The method of claim 1, wherein displacing the expansion cone relative to the  
20   tubular member comprises:  
          pushing the expansion cone through the tubular member using fluid pressure.
5. The method of claim 4, wherein pushing the expansion cone through the tubular  
      member using fluid pressure comprises:  
25       pressurizing a chamber within the tubular member below the expansion cone.
6. The method of claim 1, wherein hydroplaning the tubular member on the  
      expansion cone comprises:  
          injecting a fluidic material into an annulus between the expansion cone and the  
30       tubular member.
7. The method of claim 6, wherein the expansion cone comprises a conical outer  
      surface; and wherein the fluidic material is injected into a portion of the annulus above  
      the conical outer surface.

8. The method of claim 6, wherein the expansion cone comprises a conical outer surface; and wherein the fluidic material is injected into a portion of the annulus bounded by the conical outer surface.

5

9. The method of claim 6, wherein the expansion cone comprises a conical outer surface; and wherein the fluidic material is injected into a portion of the annulus above the conical outer surface and another portion of the annulus bounded by the conical outer surface.

10

10. The method of claim 6, wherein displacing the expansion cone relative to the tubular member comprises:

pulling the expansion cone through the tubular member using fluid pressure.

15

11. The method of claim 10, wherein pulling the expansion cone through the tubular member using fluid pressure comprises:

pressuring an annular chamber within the tubular member above the expansion cone.

20

12. The method of claim 11, wherein the operating pressure of the annular chamber and the annulus are approximately equal.

13. The method of claim 6, wherein displacing the expansion cone relative to the tubular member comprises:

25

pushing the expansion cone through the tubular member using fluid pressure.

14. The method of claim 13, wherein pushing the expansion cone through the tubular member using fluid pressure comprises:

pressurizing a chamber within the tubular member below the expansion cone.

30

15. The method of claim 14, wherein the operating pressure of the chamber and the annulus are approximately equal.

16. A system for radially expanding a tubular member, comprising:

means for positioning an expansion cone within the tubular member;  
means for displacing the expansion cone relative to the tubular member; and  
during the displacement of the expansion cone relative to the tubular member,  
means for hydroplaning the tubular member on the expansion cone.

5

17. The system of claim 16, wherein means for displacing the expansion cone  
relative to the tubular member comprises:

means for pulling the expansion cone through the tubular member using fluid  
pressure.

10

18. The system of claim 17, wherein means for pulling the expansion cone through  
the tubular member using fluid pressure comprises:

means for pressuring an annular chamber within the tubular member above the  
expansion cone.

15

19. The system of claim 16, wherein means for displacing the expansion cone  
relative to the tubular member comprises:

means for pushing the expansion cone through the tubular member using fluid  
pressure.

20

20. The system of claim 19, wherein means for pushing the expansion cone through  
the tubular member using fluid pressure comprises:

means for pressurizing a chamber within the tubular member below the  
expansion cone.

25

21. The system of claim 16, wherein means for hydroplaning the tubular member on  
the expansion cone comprises:

means for injecting a fluidic material into an annulus between the expansion  
cone and the tubular member.

30

22. The system of claim 21, wherein the expansion cone comprises a conical outer  
surface; and wherein the means for injecting a fluidic material into the annulus between  
the expansion cone and the tubular member comprises means for injecting a fluidic  
material a portion of the annulus above the conical outer surface.

23. The system of claim 21, wherein the expansion cone comprises a conical outer surface; and wherein the means for injecting a fluidic material into the annulus between the expansion cone and the tubular member comprises means for injecting a fluidic material into a portion of the annulus bounded by the conical outer surface.

24. The system of claim 21, wherein the expansion cone comprises a conical outer surface; and wherein the means for injecting a fluidic material into the annulus between the expansion cone and the tubular member comprises means for injecting a fluidic material into a portion of the annulus above the conical outer surface and another portion of the annulus bounded by the conical outer surface.

25. The system of claim 21, wherein means for displacing the expansion cone relative to the tubular member comprises:  
means for pulling the expansion cone through the tubular member using fluid pressure.

26. The system of claim 25, wherein means for pulling the expansion cone through the tubular member using fluid pressure comprises:  
means for pressuring an annular chamber within the tubular member above the expansion cone.

27. The system of claim 26, wherein the operating pressure of the annular chamber and the annulus are approximately equal.

28. The system of claim 21, wherein means for displacing the expansion cone relative to the tubular member comprises:  
means for pushing the expansion cone through the tubular member using fluid pressure.

29. The system of claim 28, wherein means for pushing the expansion cone through the tubular member using fluid pressure comprises:  
means for pressurizing a chamber within the tubular member below the expansion cone.

30. The system of claim 29, wherein the operating pressure of the chamber and the annulus are approximately equal.

31. An apparatus for radially expanding and plastically deforming a tubular member,  
5 comprising:

a tubular support member that defines a longitudinal passage;

a tubular expansion cone coupled to an end of the tubular support member that  
defines a longitudinal passage and one or more radial passages that  
extend from the longitudinal passage and extend to an outer surface of  
10 the tubular expansion cone;

a tubular expansion cone launcher that receives the tubular expansion cone;

a tubular shoe coupled to an end of the tubular expansion cone launcher that  
defines a valveable longitudinal passage;

an expandable tubular member coupled to another end of the tubular expansion  
15 cone launcher; and

one or more cup seals coupled to the tubular support member for sealingly  
engaging the interior surface of the expandable tubular member.

32. The apparatus of claim 31, wherein the tubular expansion cone comprises a  
20 tapered outer surface and a non tapered outer surface; and wherein at least one of the  
radial passages extend to the non tapered outer surface.

33. The apparatus of claim 32, wherein at least one of the radial passages extend to  
the tapered outer surface.

34. The apparatus of claim 31, wherein the tubular expansion cone comprises a  
tapered outer surface and a non tapered outer surface; wherein at least one of the  
radial passages extend to the non tapered outer surface; and wherein at least one  
other of the radial passages extend to the tapered outer surface.



Application No: GB0525663.1

Examiner: Dr Michael Gooch

Claims searched: 1-8

Date of search: 26 January 2006

### Patents Act 1977: Search Report under Section 17

#### Documents considered to be relevant:

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
A	-	US 6085838 A (VERCAEMER)
A	-	US 2001/0047870 A (COOK)
A	-	US 6470966 B2 (COOK)
A	-	US 6497289 B1 (COOK)
A	-	US 6575240 B1 (COOK)

#### Categories:

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art
Y	Document indicating lack of inventive step if combined with one or more other documents of same category	P	Document published on or after the declared priority date but before the filing date of this invention
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application

#### Field of Search:

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC<sup>x</sup> :

E1F

Worldwide search of patent documents classified in the following areas of the IPC

E21B

The following online and other databases have been used in the preparation of this search report

Online: EPODOC, WPI

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**